iNEOLIGHT

Charging Solution



- MC-1
  Lithium Battery Charger



- MC-2
  Dual Bay
  Simultaneous Charger



- TKC-9
  9 Bay Simultaneous
  Rapid Charger


MC-1

Lithium Battery Charger



FUNCTIONAL DESCRIPTION


1. Light indicators:
2. Bays
3. Vents
4. Mounting hole
   (available to mount on the wall/surface)



SPECIFICATION

Input	AC 100-277V 1.5A
Output	29.4V 1A
Charge Time (Single D24-54)	95min
Working Temperature	0~40℃
Working Humidity	1~98%
Dimension	135x90x65mm
Weight	0.5kg

DIMENSION(MM)

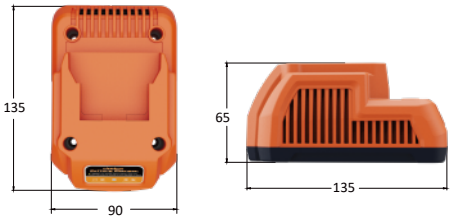

RECOMMENDED BATTERY



D24-54 D24-100

PACKAGE

Size of Box	200x95x95mm
Gross Weight	0.6kg
Size of Carton	430x220x250mm
Gross Weight	5.0kg
Box Quantity /Carton	8Pcs



INTELLIGENT CURRENT CONTROL

Charge the battery inside the light tower during operation through the external output line of the charger.




MC-2

DUAL BAY SIMULTANEOUS CHARGER



FUNCTIONAL DESCRIPTION

1. Light indicators:
2. Bays
3. Vents
4. Mounting hole
   (available to mount on the wall/surface)

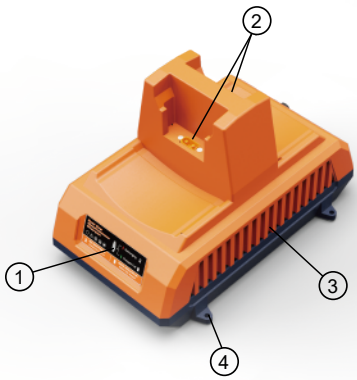

SPECIFICATION

Input	AC 100-277V 1.5A
Output	29.2V 2A
Charge Time (Single D24-100)	100min
Working Temperature	0~50℃
Working Humidity	1~98%
Dimension	251x154x153mm
Weight	0.8kg

RECOMMENDED BATTERY




D24-54 D24-100

PACKAGE

Size of Box	300x180x190mm
Gross Weight	1.1kg
Size of Carton	600x560x200mm
Gross Weight	7.5kg
Box Quantity /Carton	6Pcs

DIMENSION(MM)

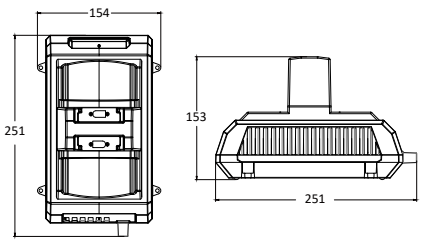

INTELLIGENT CURRENT CONTROL

Charge the battery inside the light tower during operation through the external output line of the charger.




TKC-9

9 Bay Simultaneous Rapid Charger


Carry 9 batteries and charge them in the meantime, available for several days off-grid operation.




Bracket Bracing


Storage Bag Buckle


Portable Design

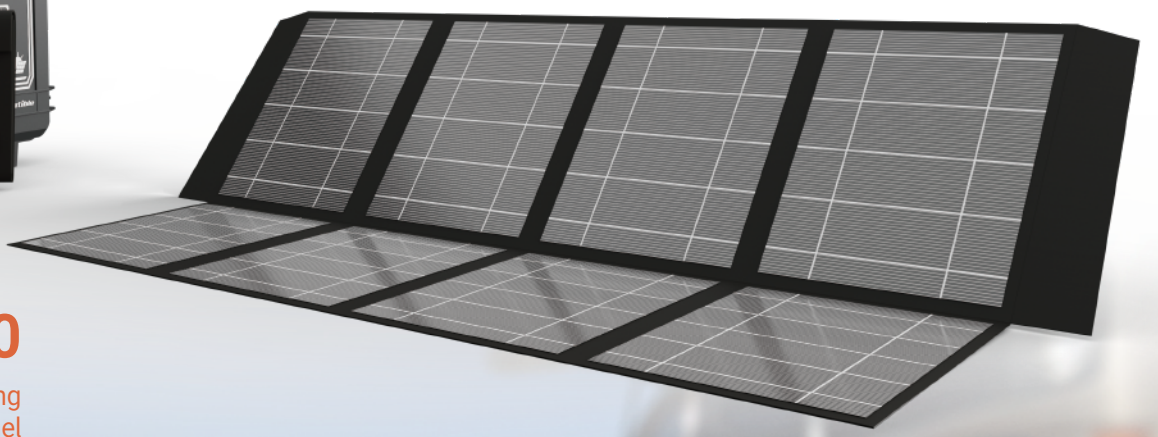


FS8-200

Portable 200W Folding Solar Panel

Durable Solar Panel

Monocrystalline

Anti-aging Coating

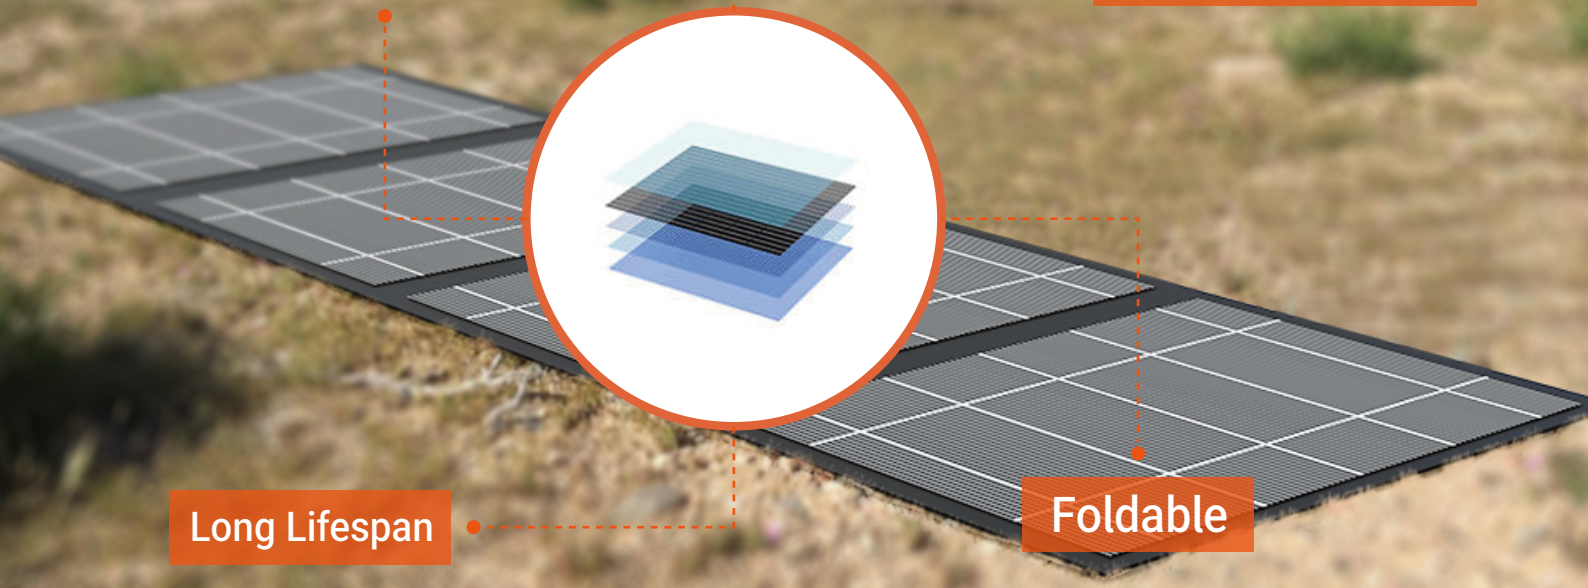

Long Lifespan

Foldable

FUNCTIONAL DESCRIPTION

1. Case
2. Charging Dock
3. Status Display
4. Indicator
5. Draw-Bar
6. Wheel
7. Folding Solar Panel(200W)



SPECIFICATION

9 Bay Simultaneous Rapid Charger

Input	AC 100-120V/200-240V
Output	29.2V 4.0A
Simultaneous Charging Battery Quantity	1～9Pcs D24-100
Charge Time(Single D24-100)	50min
Working Temperature	0～50℃
Working Humidity	1～98%
Dimension	545x406x261mm
Weight	15.5kg(9Pcs D24-100)

Folding Solar Panel

Model	FS8-200
Power	200W
Voltage	Single crystal 36V
Net weight	6.34KG
Size(Contraction)	460x340x100mm

RECOMMENDED BATTERY




D24-54　　D24-100


Charging at least 2 batteries in the meantime!

APPLICATION



DIMENSION(mm)

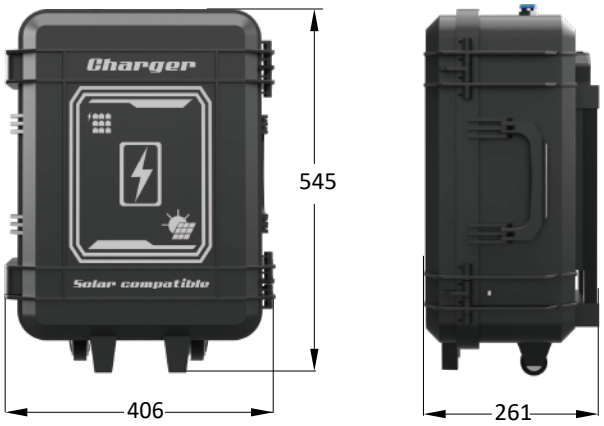

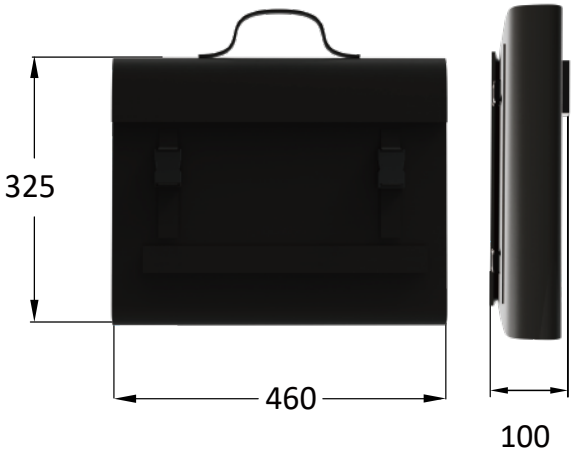

PACKAGE

Model	TKC-9
Size of Carton	58x43x29cm
Gross Weight	16.8KG (9Pcs D24-100)
Box Quantity /Carton	1Pcs

Model	FS8-200
Size of Box	52x13x40cm
Gross Weight	7.5KG
Size of Carton	54x56x43cm
Gross Weight	32KG
Box Quantity /Carton	4Pcs