iNEOLIGHT

PL-300

Deployable portable lighting in one bespoke robust package.

Petal Light Tower



HIGHER, BRIGHTER, MORE STABLE

10-second rapid expansion, easy adjustment of four lighting angles.






Original petal-shaped adjustable head offers 360-degree wide-angle illumination, from all directions to directly below the light.




Ground pegs are available to secure the light tower, providing wind and vibration resistance. **(Optional)**



One-click release or lock of the legs.



HUMANIZED DESIGN HIDDEN IN THE DETAILS

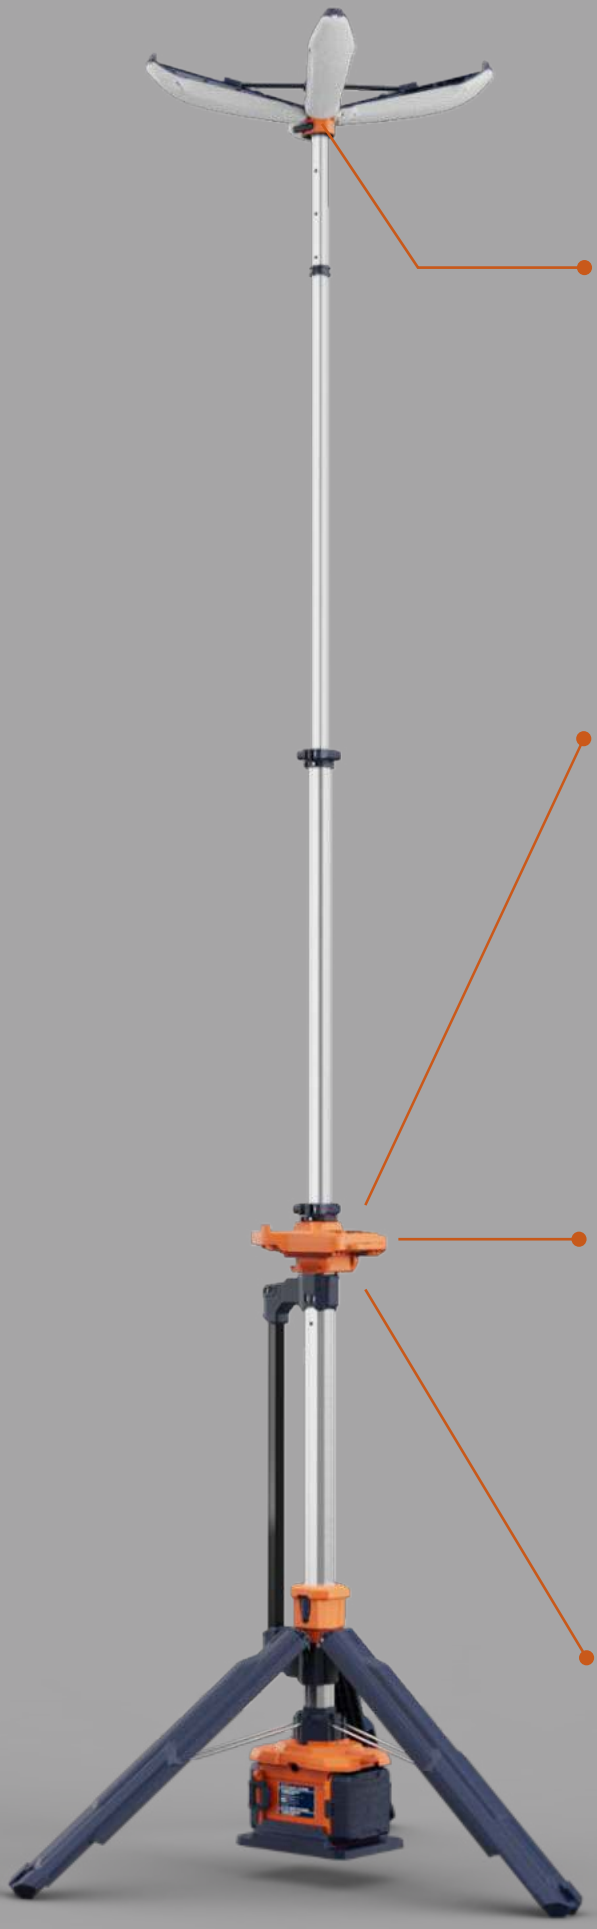



360° Lighting.

Biomimetic petal-inspired design for lightweight spherical/hemispherical lighting product.



USB Output

Dual rainproof USB outputs for charging two devices at once, rain or shine.



Phone Stand

Continue working while charging, the hook here can serve as a phone stand.



Stepless Dimming

Plug the driver into the rainproof port to unlock maximum brightness and stepless dimming.

LOWER CENTER OF GRAVITY, GREATER STABILITY

Ultra-low center of gravity combined with extended legs effortlessly handles strong winds.



Ultra-long working hours

Standard Mode Up To **13+** Hours
(D24-100 x 2)

Battery compartment fits two replaceable battery packs.



2 types of battery packs with different capacities have same contact slot.



D24-54 x 2

Typical working hours 36+ hours on PL-300 Eco mode.




D24-100 x 2

Doubled typical working hours to 71+ hours.

Uniform and non-glaring 360-degree illumination, leaving no dark spots.

- Lighting Area 2200 m^2

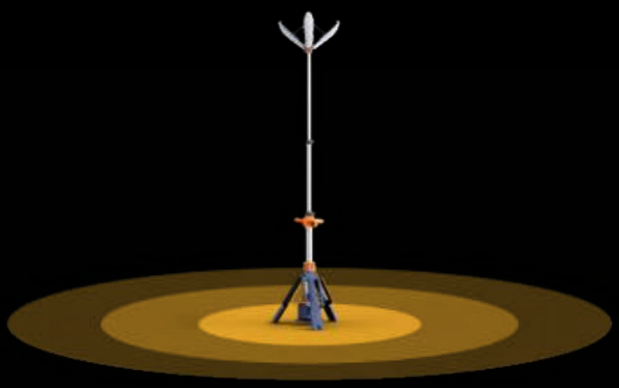

AC Powered
Up To **14,000** LM

Battery-powered
Up To **8,000** LM

Stepless Dimmable (AC Powered)

0 — 14,000LM

4 levels of Brightness (Battery Powered)

Eco	Balanced	Standard	Turbo
800LM	3000LM	5000LM	8000LM



Construction



Maintenance



Rescue



Emergency



Railway



Mining




Camping



Sport

Designed for single-person operation

Easy to grip and move,
weight 8.8 kg excluding battery pack.

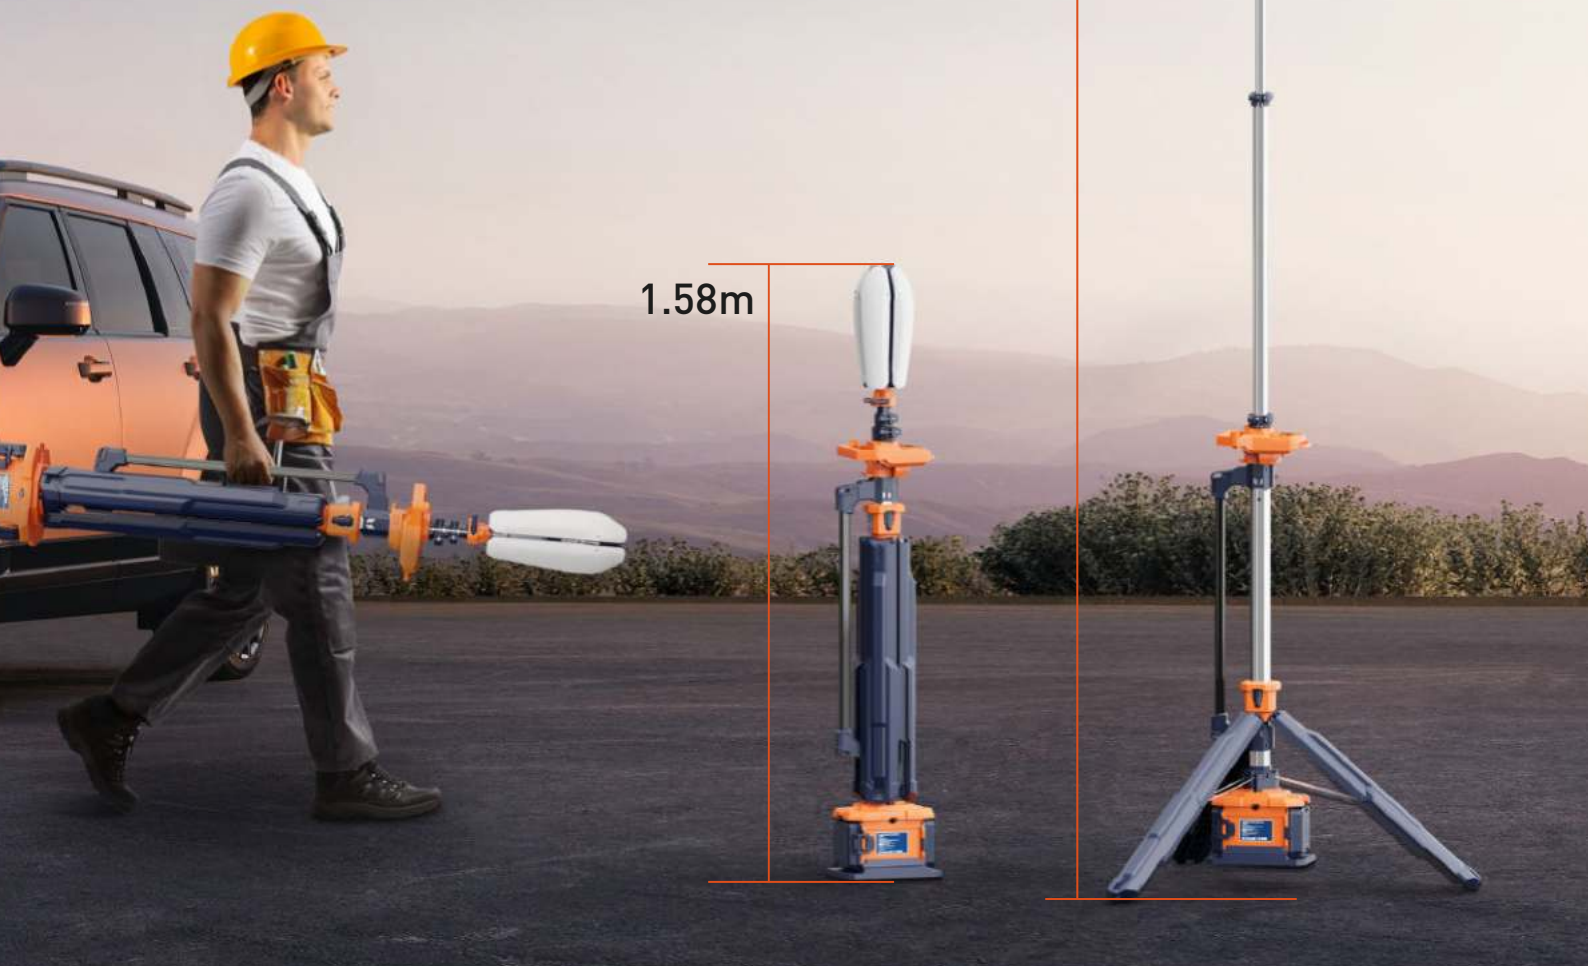


Specifications

PL-300

Height	1.58m~3.4m
Weight	8.8Kg (Fitting only)
Power Supply	D24 series battery pack / AC 100-277V
Lumens	0 - 14,000Lm
Run Times	>13 hours (Standard mode, D24-100 x 2)
IP Grade	IP66
Output(USB)	5V 2A (2 Dock)



Size (mm)

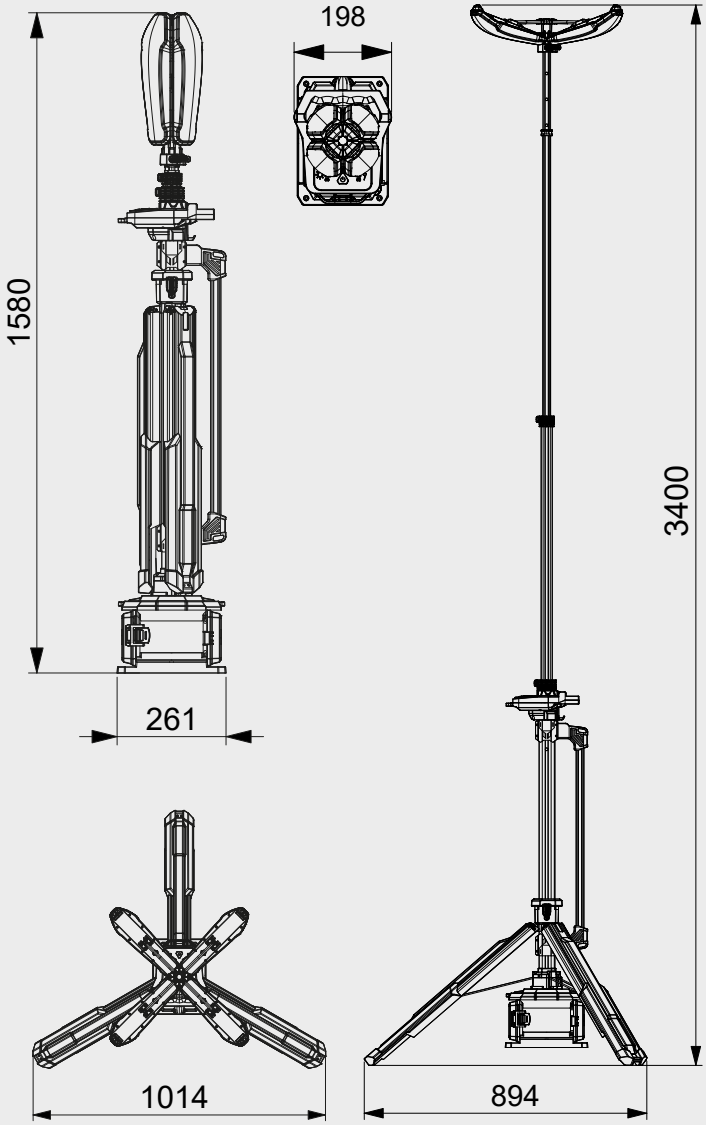

Package

Model	PL-300
Size of Carton	1660x280x390mm
Gross Weight of Carton	13KG
PCS/Carton	1

