
iNEOLIGHT



Portable Site Light

PS-200

Deployable portable lighting in one bespoke robust package.

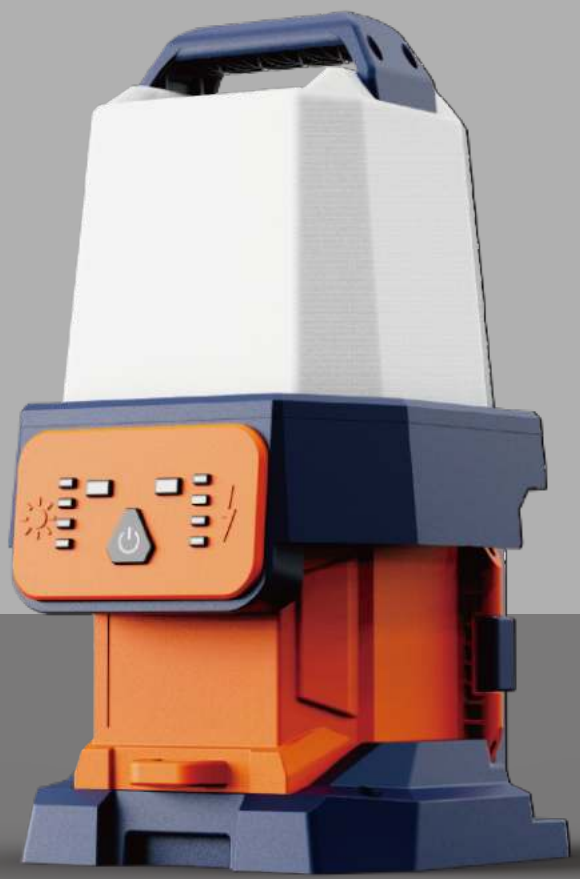



Turbo	5,000LM
Standard	3,000LM
Balanced	1,800M
Eco	500LM

Application










Ultra-long Endurance

Standard Mode Up To 8+ Hours
(D24-100)

Various working modes.

Eco	Balanced	Standard	Turbo
45h	16h	8h	4h



Placed on any surface or hung up to provide continuous lighting for complex environments.

2KG

Ultra-lightweight and capable of carrying multiple at once.

360-degree lighting that can illuminate all details even in small spaces.

360° lighting


Specifications

PS-200

Weight	2.0kg (Fitting only)
Power Supply	Battery
Lumens	0 - 5,000Lm
Run Times	>8 hours (Standard mode, D24-100)
IP Grade	IP66
Battery System	D24 Series
Working Temp.	-10℃~50℃
Working Humidity	1~98%

Size (mm)



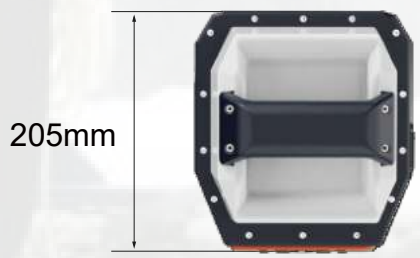

Package

Modle	Size of Carton	Gross Weight of Carton	PCS/Carton
PS-200	220x240x500mm	2.3KG±5%	1

