iNEOLIGHT

TL-100

Deployable portable lighting in one bespoke robust package.

Portable Light Tower



EXPAND OR COLLAPSE WITHIN 1 SECOND

World's lightest portable light tower, one second operation.

Grab and lift the lamp head to 1.4m for automatic locking; tap down to reset and lock.



LIGHT HEAD FREELY ADJUSTABLE

Built-in damping enables tool-free light head adjustment with a finely-tuned, perfect tactile feel.



GLOBAL LIGHTEST 1.4M LIGHT TOWER


Super light-weight, with an handgrip, improve your work experience delightfully.



Ultra-long Working Hours
(D24-100)

Standard mode >8 hours

Eco mode >44 hours

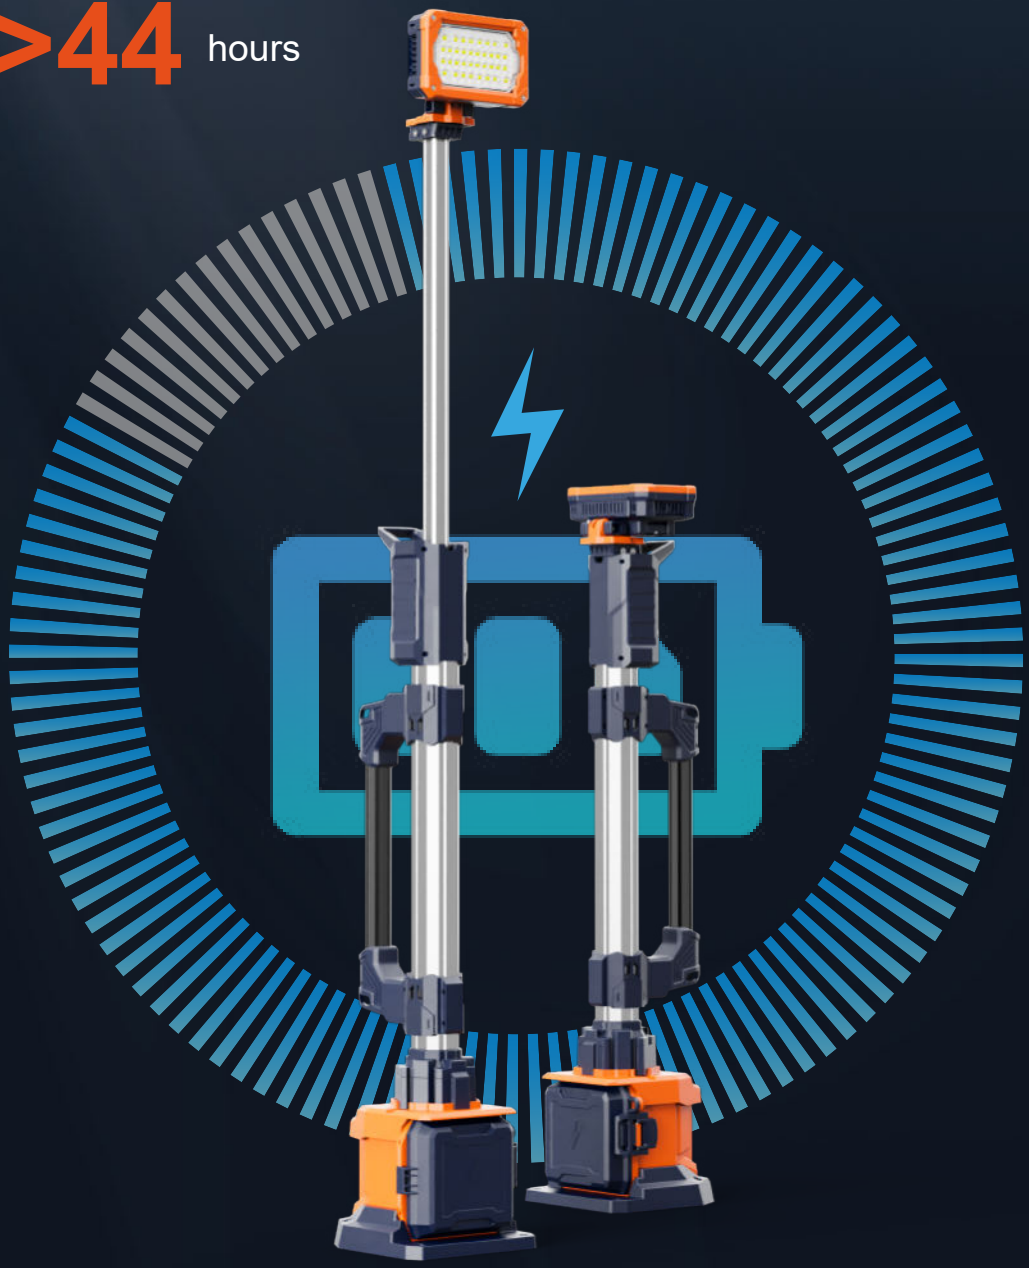

2 types of battery packs with different capacities are available.



D24-54

Typical working hours 22+ hours on Eco mode.



D24-100


Doubled typical working hours to 44 hours

ONE-KEY ADJUSTMENT FOR MULTIPLE BRIGHTNESS MODES


ECO	Balanced	Standard	Turbo
450LM	1500LM	2500LM	4000LM
44h	16.8h	8.5h	4.2h

Battery-powered
Up To
4000LM







Construction




Maintenance




Road Rescue




Camping



Repair



Railway




Emergency



Sports

One person operation

Less than 2.9Kg excluding battery.

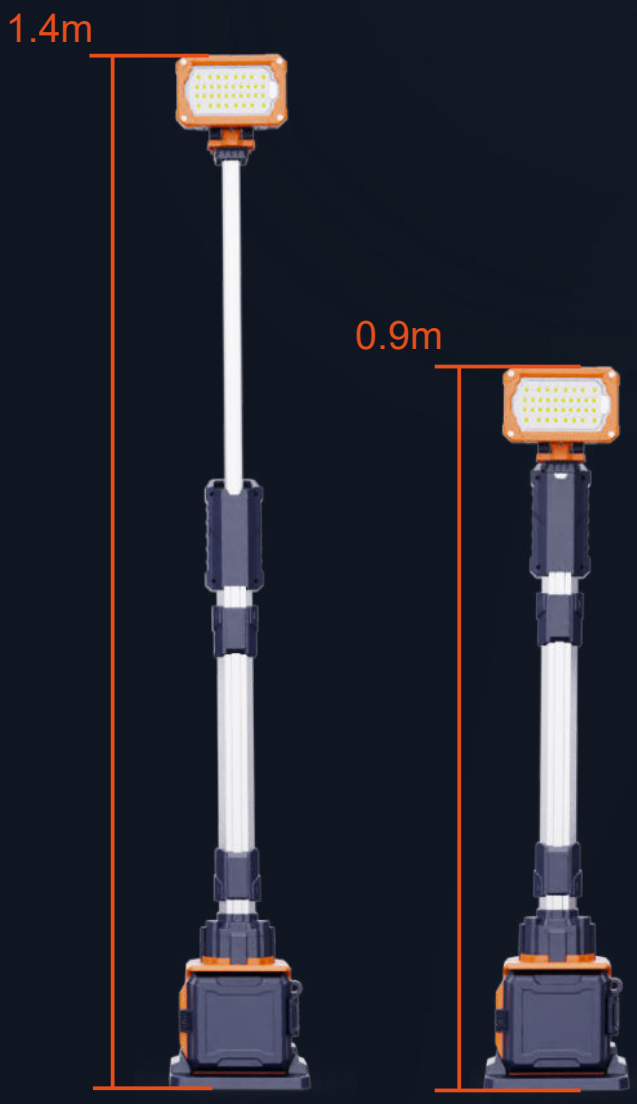




Specifications

TL-100

Height	0.9m-1.4m
Weight	2.9kg
Power Supply	D24 series battery pack
Lumens	0-4,000Lm
Run Times	>8 hours (Standard mode, D24-100)
IP Grade	IP66



Size (mm)

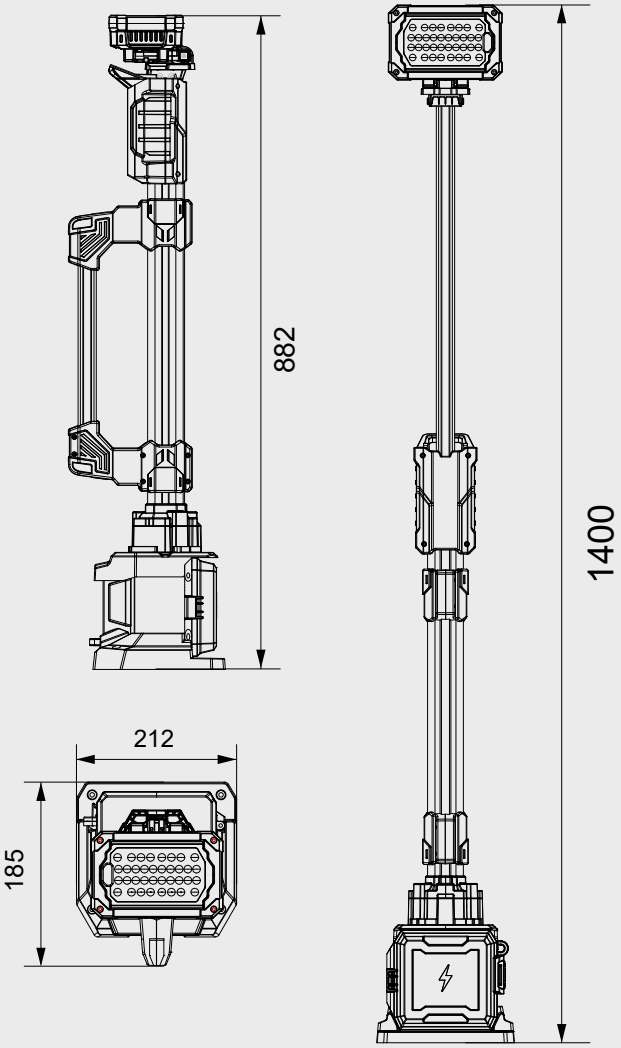

Package

Model	TL-100
Size of Carton	930x245x260mm
Gross Weight of Carton	6.5kg
PCS/Carton	1



